

KEY FEATURES



- High power handling and low distortion 15" subwoofer
- Exclusive Malt Cross® Technology Cooling System
- Low power compression losses
- High sensitivity: 97 dB (1W / 1m)
- FEA optimized neodymium magnetic circuit
- Ultra low air noise
- Optimized linear behaviour
- Waterproof cone with treatment for both sides
- 3,5" DUO in/out copper voice coil
- Extended controlled displacement: $X_{max} \pm 11$ mm
- 51 mm peak-to-peak excursion before damage
- Optimized for direct radiation and band-pass subwoofer applications



TECHNICAL SPECIFICATIONS

Nominal diameter	380 mm	15 in
Rated impedance		8 Ω
Minimum impedance		7,4 Ω
Power capacity ¹	1.000 W _{AES}	
Program power ²	2.000 W	
Sensitivity	97 dB	1W / 1m @ Z _N
Frequency range	40 - 1.000 Hz	
Recom. enclosure (Bass-reflex design)	V _b = 115 l F _b = 42 Hz	
Voice coil diameter	88,9 mm	3,5 in
BI factor		23,2 N/A
Moving mass		0,142 kg
Voice coil length		27 mm
Air gap height		12 mm
X _{damage} (peak to peak)		51 mm

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.


² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁴ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.

THIELE-SMALL PARAMETERS³

Resonant frequency, f _s	41 Hz
D.C. Voice coil resistance, R _e	5,4 Ω
Mechanical Quality Factor, Q _{ms}	5,1
Electrical Quality Factor, Q _{es}	0,37
Total Quality Factor, Q _{ts}	0,34
Equivalent Air Volume to C _{ms} , V _{as}	116 l
Mechanical Compliance, C _{ms}	106 μ m / N
Mechanical Resistance, R _{ms}	7,2 kg / s
Efficiency, η_0	2,1 %
Effective Surface Area, S _d	0,088 m ²
Maximum Displacement, X _{max} ⁴	11 mm
Displacement Volume, V _d	968 cm ³
Voice Coil Inductance, L _e	1,7 mH

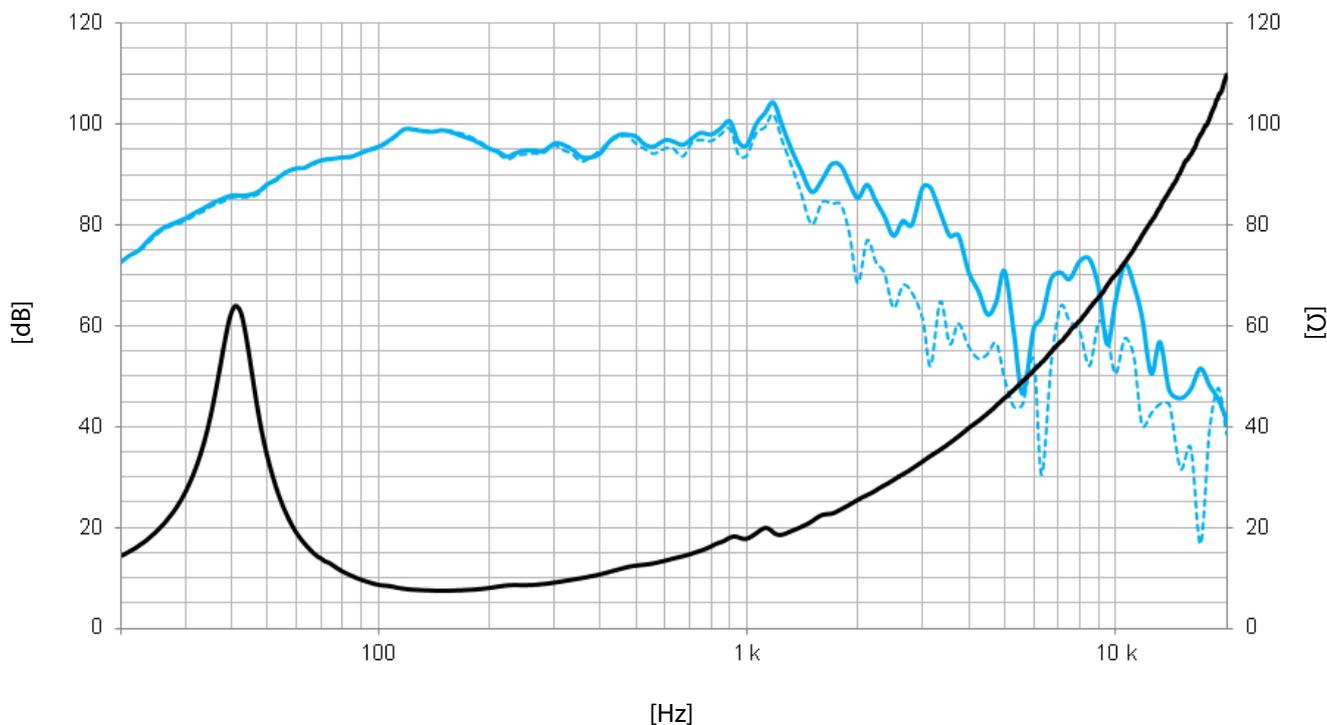

Note: Frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

— Frequency response on axis
- - - Frequency response 45° off axis

MOUNTING INFORMATION

Overall diameter	393 mm	15,5 in
Bolt circle diameter	373 mm	14,7 in
Baffle cutout diameter:		
- Front mount	352 mm	13,9 in
Depth	182 mm	7,2 in
Volume displaced by driver	5,0 l	0,18 ft ³
Net weight	11,0 kg	24,2 lb
Shipping weight	12,0 kg	26,4 lb

DIMENSION DRAWING

